



The Evolution **Stroke-Set™ Tubing Anchor Catcher (TAC)** is a slimline tension anchor catcher designed to be used in rod pumping operations to anchor tubing in tension. Setting or releasing the anchor is done by lifting or lowering the tubing to shift the operating position. Full drift inside ID and exceptional bypass.

Key Features

- Built-in auto-J for ease of setting and releasing anchor without rotation.
- Slimline for improved gas bypass and increased production rates.
- Hardened mandrel to reduce rod wear on ID and on control grooves.
- Integrated tubing anchor catcher.
- Emergency tension release.
- Emergency right hand torsion release on Top Sub.

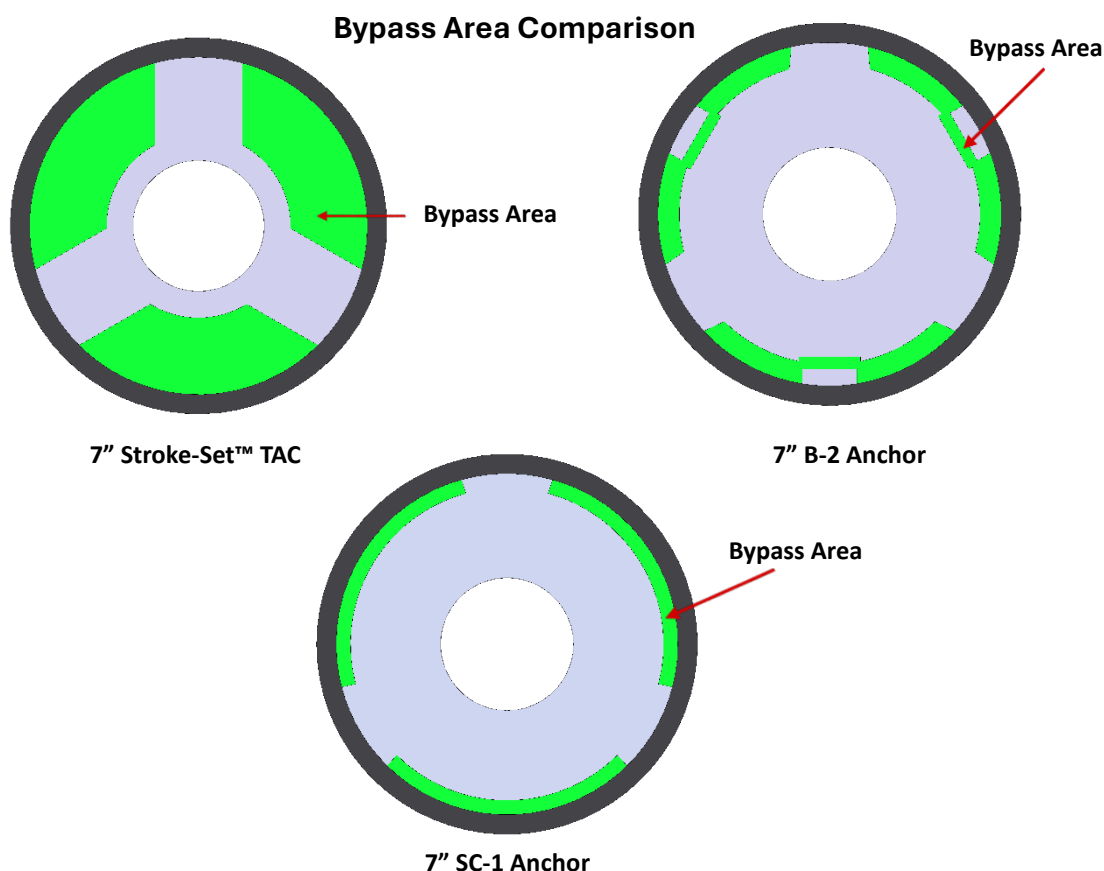

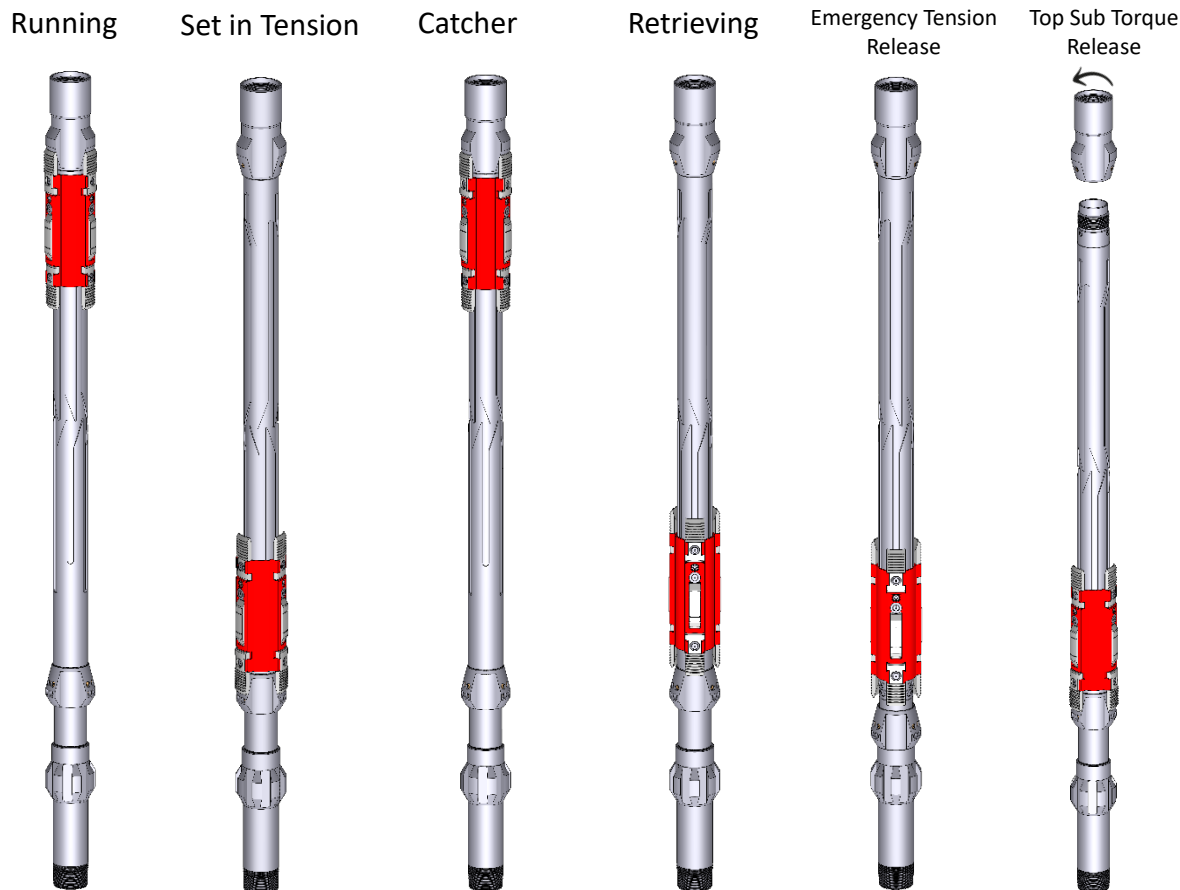

Stroke-Set™ TAC Specifications					
Casing		TAC			
Size	Weight	Min. O.D.	I.D.	Length	Thread Connectim I
in mm	lbs/ft kg/m	in mm	in mm	in mm	in mm
5-1/2 139.7	20.0 - 26.0 29.8 - 38.7	4.42 112.3	2.44 62.0	74.41 1890.0	2-7/8 EUE
	13.0 - 17.0 19.4 - 25.3	4.75 120.7		75.01 1905.3	73.0 EUE
6.0 152.4	22.3 - 26 33.2 - 38.7	4.75 120.7	2.44 62.0	75.01 1905.3	2-7/8 E 73.0 EUE
7 177.8	26.0 - 32.0 38.7 - 47.6	5.964 151.5	2.44 62.0	77.16 1959.9	2-7/8 EUE 73.0 EUE
			3.00 76.2	77.16 1959.9	3-1/2 E 88.9 EUE
	17.0 - 26.0 25.3 - 38.7	6.146 156.1	2.44 62.0	77.34 1964.4	2-7/8 E 73.0 EUE
			3.00 76.2	77.34 1964.4	3-1/2 E 88.9 EUE