



Auto Latch Tubing Hanger

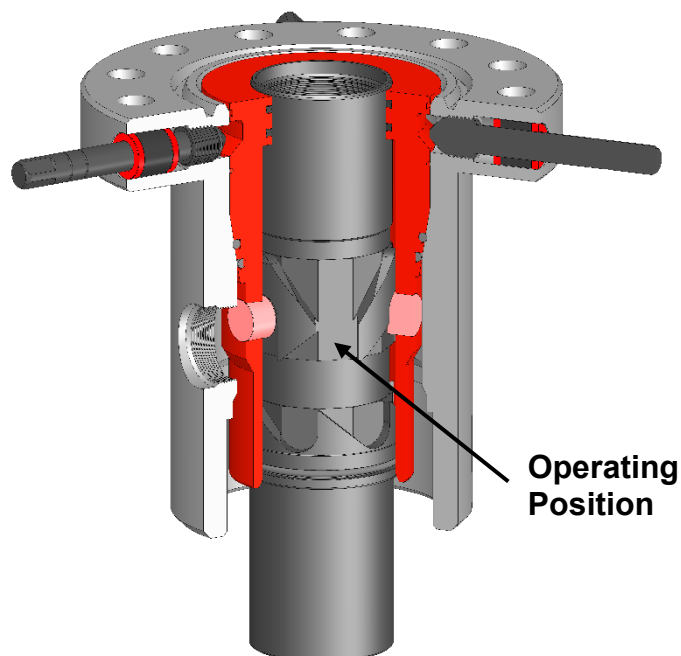

Non-rotating Hanger

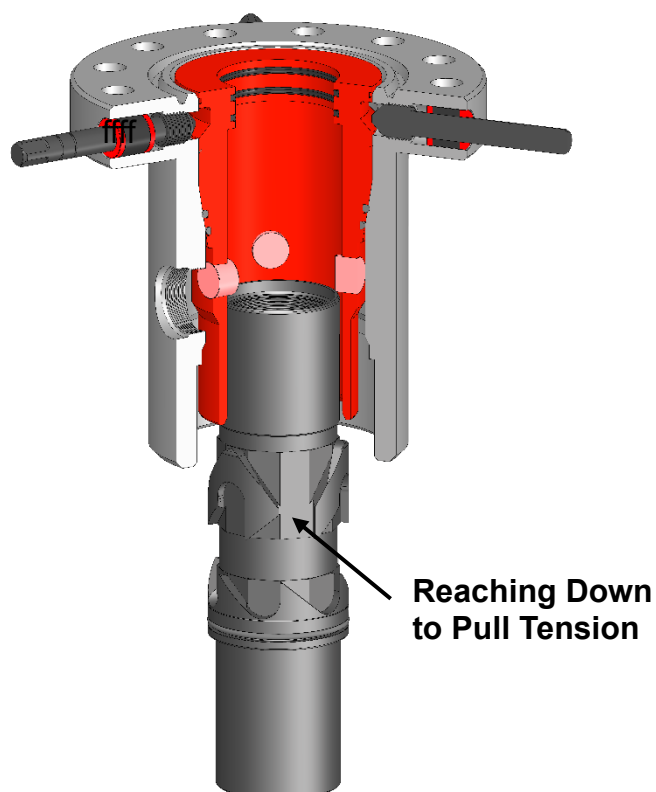


The **Evolution Auto Latch Tubing Hanger** is a tubing hanger designed to set and release with up and down motion of a handling joint for both PCP and SRP applications. Ideal to set tension anchors through the service BOP with complete well control.


Features

- Automatic latching and unlatching with only up and down motion.
- Eliminates the use of low-lying slips and overpull
- Seal above lock-down bolts to protect threads from solids and corrosion
- No hand tools are required to attach the mandrel to the hanger shell
- Optional BPV threads in tubing hanger for tubing side well control
- Also available for Rotating (with E-Style rotator) and Integral rotator

**A-Style Auto Latch
Non-rotating**

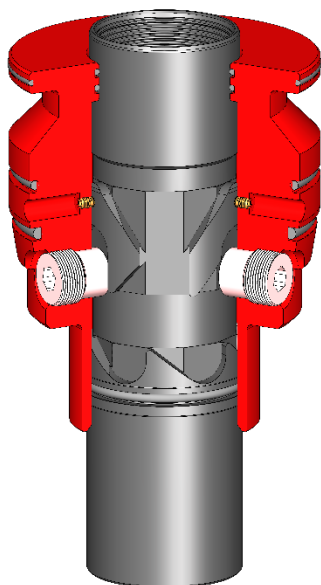

**CT Auto Latch
Non-rotating**

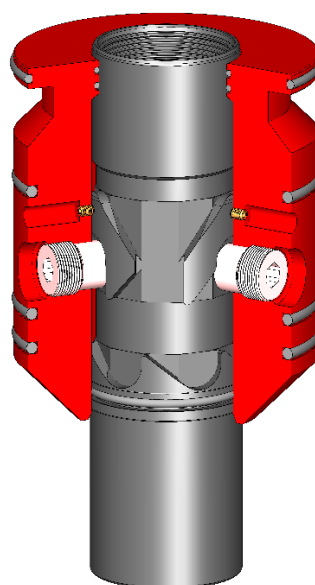

Specifications										
Casing			Auto Latch Tubing Hanger							
Size	Weight	Min. Drift Size	Mandrel Thread	Mandrel O.D.	A-Style Hanger Assembly Part #	CT-Style Hanger Assembly Part #	Mandrel Part #	Lower Thread	# of Pins	Max. Load Rating
in mm	lbs/ft kg/m	in mm	in mm	in mm						lbs kgs
4-1/2 114.3	9.5 - 15.1 14.1 - 22.5	3.701 94.0	2-3/8 EUE 60.3 EUE	3.695 93.9	205199	205269	205201	Box	3	80,000 36,287
5 127.0	11.5 - 18.0 17.1 - 27.8	4.151 105.4								
5-1/2 139.7	14.0 - 39.3 20.8 - 58.5	3.919 99.5								
4-1/2 114.3	9.5 - 13.5 14.1 - 20.1	3.795 96.4	2-7/8 EUE 73.0 EUE	3.747 95.2	203735	204797	203737	Box	3	80,000 36,287
5 127.0	11.5 - 18.0 17.1 - 27.8	4.151 105.4								
5-1/2 139.7	14.0 - 32.2 20.8 - 47.9	4.151 105.4								
7 177.8	17.0 - 38.0 25.3 - 56.6	5.795 147.2								
5-1/2 139.7	14.0 - 17.0 20.8 - 25.3	4.767 121.1	3-1/2 EUE 88.9 EUE	4.747 120.6	203135	-	202370	Pin	4	90,000 40,823
7 177.8	17.0 - 38.0 25.3 - 26.6	5.795 147.2			240135		203957	Box		
5-1/2 139.7	14.0 - 17.0 20.8 - 25.3	4.767 121.1			205266	205265	204357	Box	3	
7 177.8	17.0 - 38.0 25.3 - 26.6	5.795 147.2								

Note: Adapter flanges available for unknown or unverifiable Tubing Head Profiles.